



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 623, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

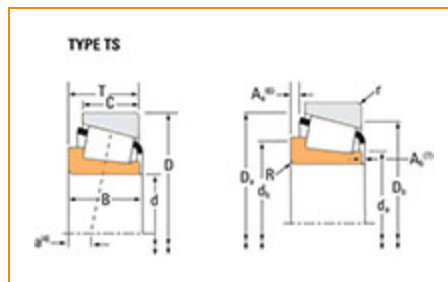

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	615
Cone Part Number	623
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	81200 lbf 361000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	21100 lbf 93700 N



Dimensions

d - Cone Bore	2 1/4 in 57.15 mm
B - Cone Width	1.625 in 41.275 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.14 in 3.600 mm
da - Cone Frontface Backing Diameter	2.6 in 66 mm
db - Cone Backface Backing Diameter	2.83 in 72 mm
Ab - Cage-Cone Frontface Clearance	0.11 in 2.8 mm
Aa - Cage-Cone Backface Clearance	0.13 in 3.3 mm
a - Effective Center Location⁴	-0.55 in -14 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	12100 lbf 53800 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	46600 lbf 207000 N
C0 - Static Radial Rating	54800 lbf 244000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	6510 lbf 28900 N

Factors

K - Factor⁸	1.86
G1 - Heat Generation Factor (Roller-Raceway)	75.9
G2 - Heat Generation Factor (Rib-Roller End)	16.2
Cg - Geometry Factor⁹	0.0694

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

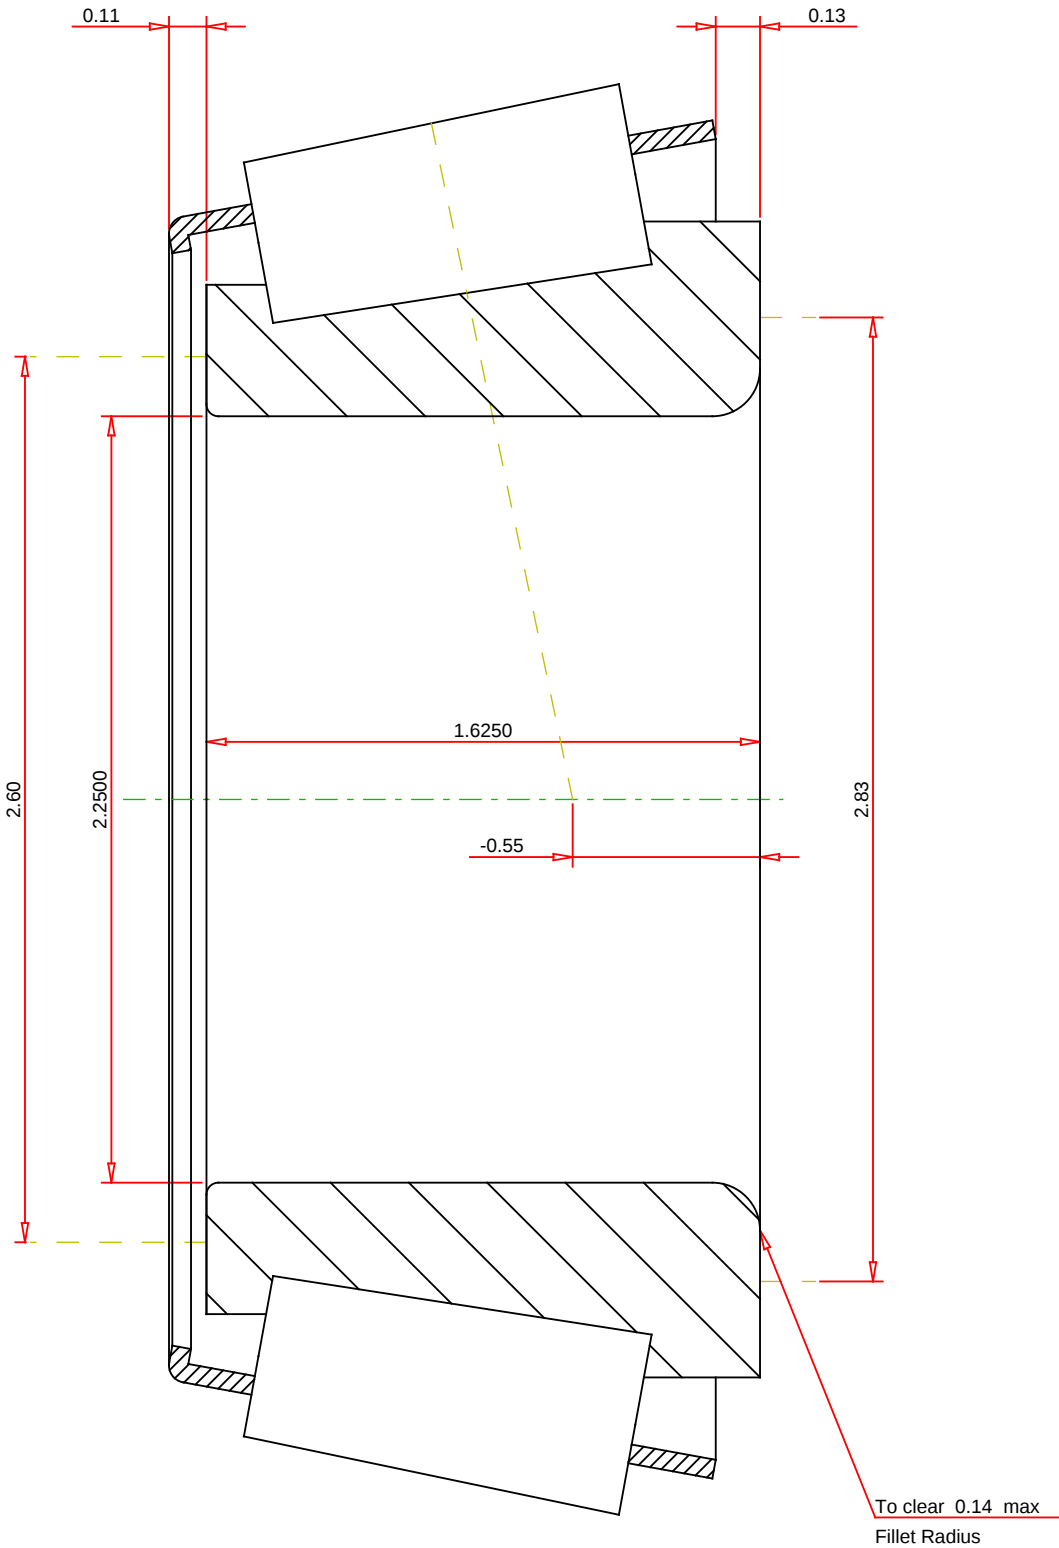

IMPERIAL UNITS

Number of Rollers Per Row15	TIMIKEN® THE TIMKEN COMPANY NORTH CANTON, OHIO USA	623 Tapered Roller Bearings - Single Cones - Imperial K Factor Dynamic Radial Rating - C90 Dynamic Thrust Rating - Ca90 Dynamic Radial Rating - C1 1.86 53800 lbf 28900 lbf 207000 lbf
Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.		FOR DISCUSSION ONLY